Ken-Tool®

Reshaping the way tires are changed™

Tire Service Tools and Equipment, Specialty Tools, Vises and Clamps

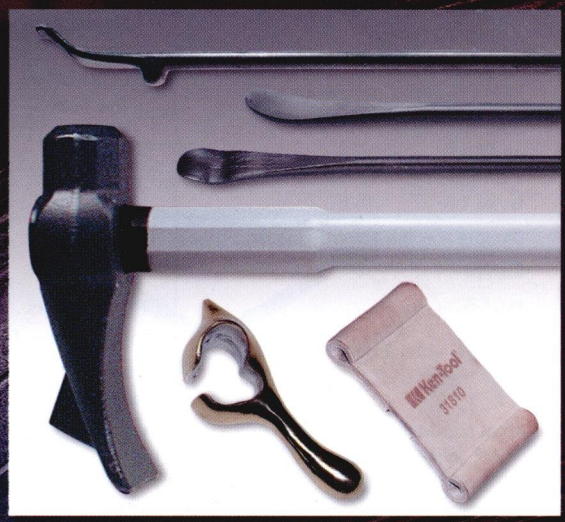

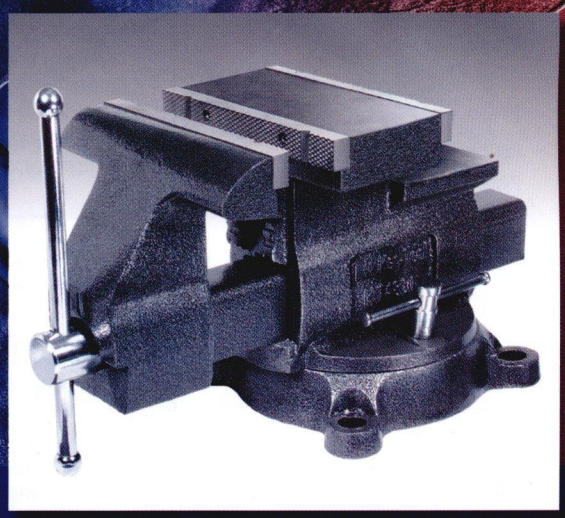

Catalog KT 0503 / Supersedes Cat. No. KT 0102

Product Index

A

Aluminum Wheel Protector 8

B

Ball Joint Separator 17
Bead Breakers
- ATV 16
- Driving Iron 6
- Floor Type 6
- Impact 6
- Portable 6
- Truck/Farm/OTR 6
- Wedges 11

Bead Expanders, Pneumatic 12
Bead Holding Device 8
Bead Seaters 12

C

Chrome Lug Nut Cover Remover .12
Clamps 17

D

Dual Wheel Stud Remover 4

F

Front End Tools
- Ball Joint Separator 17
- Pitman Arm Wedge 17
- Separator Tool 17
- Shock Link/Tie Rod Separator .17

H

Hammers
- Cross-Pein/Blacksmith 11
- Dead Blow 11
- Epoxy Kits 10
- General Purpose 10
- Heavy-Duty 10
- New England Hand Drilling 11
- Rubber Mallet 11
- Sledge 11

Handles
- Aluminum, Fiberglass, Wood ...10

L

Leak Locator 14
Leverage Bar 4, 6
Lock Ring Tools 7
Lubricant, Tire & Bead 14

M

Manual Tire Changers for Small Tires 16

P

Pitman Arm Wedge 17
Pry Bars 17

R

Rim Guard 5

S

Separator Tool 17
Shock Link/Tie Rod Separator 17
Sockets
- Flip Socket 12
- Heavy-Duty Impact 12

Socket Inserts 3
Socket Sets 13
Spring Compressor
- MacPherson Strut 17

Swab, Bead Lubricant 14

T

Tire Changing Stand 15
Tire Inflation Cages 15
Tire Irons (Mount/Demount)
- Center Post 7
- European Style 8
- Heavy Duty/Truck 8, 9
- Motorcycle/Small Wheel 7
- Serpent™ Tire Changing System ..9
- Super Single 8
- Tire Snakes® 16
- Tubeless 8, 9

Tire Knocker 11
Tire Spoons
- Curved 9
- Drop-Center 9
- Straight 9

Tire Spreaders 14
Torque Master Torque Sticks 5
Truck Wrench Handle (Leverage Bar) 4

V

Valve Repair Tools 14
Vises
- Pro Reversible Mechanic's 18
- Pro Workshop 18

W

Wedges 11
Wheel Balancer 14
Wheel Cover Puller/Replacers 17
Wheel Lock Remover 12
Wheel Lock Removal Kit 12
Wheel Weight Tools 14
Wire Brush 14
Wrenches
- 4-Way Lug Wrenches
  - Folding 19
  - Heavy-Duty Truck 3
  - Light Truck/SUV 3, 19
  - OTR 3
  - Passenger Car 3, 19
  - Telescoping 19
- Cap Nut
  - Combination 6
  - Heavy-Duty 6
  - Ken-Tool Porkchop™ 6
- Double-End Truck 4
- Power Wrench 4
- Shock Wrench 4
- Wrench Support Stand 4

● Limited quantity
(Available until stock is depleted)

NEW Look for this symbol beside individual product listings for exciting new tools from Ken-Tool

All weights and measurements are nominal. Variations in manufacturing may occur.

Quick Index

Wrenches 3-6, 19
Bead Breakers 6, 11, 16
Lock Ring Tools 7
Mount/Demount Tools 7-9
Wedges, Hammers & Handles 10-11
Tire Service Tools 12-13
Socket Sets 13
Tire Service Tools & Supply 14
Inflation Cages & Equipment 15
Small-Tire Service Tools & Equipment 7, 16
Shop Service Tools 17
C-Clamps 17
Vises 18
Nut Busters® 19

Ken-Tool®

Reshaping the way tires are changed™

Ken-Tool has been providing tire changing tools and equipment to the world's automotive aftermarket for over 80 years. We have faced the demands of many different customers, always choosing to provide the highest quality tools for the best value. Our quality criteria in engineering, research, and product development meet or exceed normal standards. We continually work to improve existing products throughout their life cycle and create new products that earn instant acceptance. We begin with the finest raw materials. In many cases, we drop-forge and heat-treat our tools to further strengthen the inherent ability of the raw steel, and provide for a long life of hard use. Our complete line of tire changing tools, bead breaking tools, lug wrenches, rim service tools, and specialty tools makes us the industry leader. Our emphasis on world class manufacturing practices makes us the best. It is the unique combination of our research, manufacturing, customer service, and shipping excellence which gives you the best made tire changing products in the world.

We believe all Ken-Tool customers should be satisfied with the performance, quality, and workmanship of whatever product they buy. All Ken-Tool products are warranted against defects in materials and workmanship. Any Ken-Tool branded product which fails to perform its intended function, due to defect in workmanship or materials will, at our option, be replaced or repaired free of charge. Warranty claims for items that have broken or are no longer useful due to normal wear, misuse, abuse, alteration, grinding, or heating, will not be honored.

Ken-Tool®
768 E. North St. • P.O. Box 9320 • Akron, Ohio 44305
Phone: 330-535-7177 • Fax: 330-535-1345
E-mail: sales@kentool.com
www.kentool.com
www.oldforge.com www.caricatools.com

MADE IN U.S.A.

WARNING: Always wear safety goggles when using hand tools

Four-Way Lug Wrenches

Ken-Tool offers the world's largest selection of quality lug wrenches, available in sizes to fit all your tire changing needs - SAE and Metric.

Professional Lug Wrenches

These wrenches are America's premier professional lug wrenches for cars and light trucks/RV's/vans. Drop-forged centers for extra strength. Keep wrenches in trunk for emergencies or everyday use.

Model	EDP No.	Description	Socket Sizes	Length	Stock	Weight
T56	35656	Passenger	17, 19, 21, 22 mm	20" 51 cm	5/8" 16 mm	4 lbs 1.8 kg
T57®	35657	Passenger	3/4", 13/16", 7/8", 15/16"	23" 58 cm	5/8" 16 mm	4.5 lbs 2.0 kg

Standard Lug Wrenches

Welded center construction for strength and durability. Premium grade, special bar quality steel for extra strength.

Model	EDP No.	Description	Socket Sizes	Length	Stock	Weight
T59	35659	Passenger	3/4", 13/16", 7/8", 15/16"	22" 56 cm	5/8" 16 mm	4.2 lbs 1.9 kg
T90	35690	Light Truck	7/8" deep well, 15/16", 1", 1-1/16"	25" 64 cm	3/4" 19 mm	7.2 lbs 3.2 kg

Economy Lug Wrenches

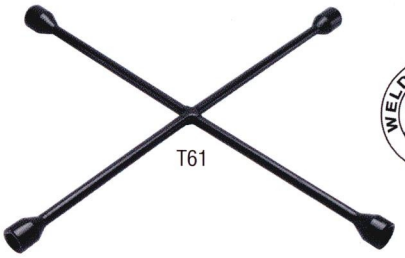

These wrenches have fully welded centers which stand up to everyday use. 3/4" SAE is also 19 mm.

Model	EDP No.	Description	Socket Sizes	Length	Stock	Weight
T9520	35620	Passenger	3/4", 13/16", 7/8", 17 mm	20" 51 cm	9/16" 14 mm	3.4 lbs 1.5 kg
T61	35661	Passenger	3/4", 13/16", 7/8", 17 mm	22" 56 cm	9/16" 14 mm	3.8 lbs 1.7 kg
T62	35662	Passenger	3/4", 13/16", 7/8", 17 mm	18" 46 cm	9/16" 14 mm	3.2 lbs 1.5 kg
T63	35663	Passenger	17, 19, 21, 22 mm	18" 46 cm	9/16" 14 mm	3.2 lbs 1.5 kg

Heavy-Duty Truck Lug Wrenches

Use on heavy-duty truck, bus, and tractors. Drop-forged or welded center provides strength and durability. **T95, TM95,T95A,** and **TC95** wrenches have center hole for a leverage bar. Socket Sizes provided fit most metric or SAE lug nuts on today's trucks. Stock: 1" (25 mm).

Model	EDP No.	Socket Sizes	Length	Weight
T95	35695	1-1/16", 1-1/4", 1-1/2", 13/16" square	27-1/2" 70 cm	13.8 lbs 6.2 kg
TM95	35795	24, 27, 30, 33 mm	27-1/2" 70 cm	13.5 lbs 6.1 kg

Model	EDP No.	Socket Sizes	Length	Weight
T95A	35697	1-1/4", 1-1/2", 13/16" sq., 3/4" service arm	27-1/2" 70 cm	13.5 lbs 6.1 kg

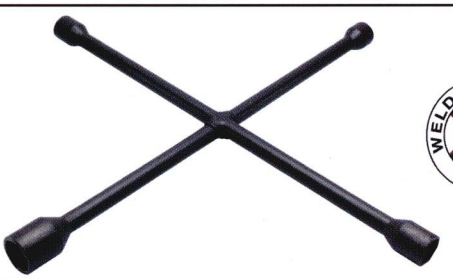

Model	EDP No.	Socket Sizes	Length	Weight
T96	35696	1-1/16", 1-1/4", 1-1/2", 13/16" square	27-1/2" 70 cm	13.5 lbs 6.1 kg

Model	EDP No.	Socket Sizes	Length	Weight
TC95	35595	1-1/2", 13/16" square, 30, 33 mm	27-1/2" 70 cm	14.2 lbs 6.4 kg

Socket Inserts

Package of 4, for use with: 7/8", 11/16", 3/4", and 13/16" hex nuts. Protects plated, painted, or capped lug nuts from damage. Socket inserts fit most standard lug wrenches and impact sockets. Socket inserts require a 1/16" hex size larger socket than the lug nut's hex size.

Model	EDP No.	Description	Weight
35611	35611	Protective plastic covers	6 oz (.2 kg)

MADE IN U.S.A.

Double-End Truck Wrenches

Use on trucks, buses, farm, and off-road vehicles. Great for on-the-road service.
Sizes available for all SAE and metric lug nuts.
All wrenches are forged from 1" alloy steel for long lasting strength.
Length: 16" (41 cm). Use **TR5** truck wrench handle.

SAE

Model	EDP No.	Sockets Sizes	Weight
TR1	32501	1-1/8" with 13/16" Sq. x 1-1/2"	4.6 lbs (2.0 kg)
TR2	32502	1" with 5/8" Sq. x 1-1/4"	4.3 lbs (1.9 kg)
TR3	32503	7/8" x 1-1/16"	4.5 lbs (2.0 kg)
TR3A	32505	1-1/16" x 1-1/8"	4.5 lbs (2.0 kg)
TR3X	32506	1-1/16" x 1-3/16"	4.5 lbs (2.0 kg)
TR98	32508	1-1/2" x 13/16" Sq.	4.5 lbs (2.0 kg)
TR9	32509	1-1/4" x 1-1/16"	4.4 lbs (2.0 kg)

METRIC

Model	EDP No.	Sockets Sizes	Weight
TRM1	32551	17 mm sq. x 35 mm	4.5 lbs (2.0 kg)
TRM2	32552	24 mm x 33 mm	4.4 lbs (2.0 kg)
TRM3	32553	27 mm x 30 mm	4.5 lbs (2.0 kg)
TRM6	32556	21 mm sq. x 41 mm	4.5 lbs (2.0 kg)
TRM7	32557	30 mm x 33 mm	4.5 lbs (2.0 kg)

Truck Wrench Handle

Heat-treated for strength and durability.

Model	EDP No.	Length	Stock	Weight
TR5	32318	22" (56 cm)	3/4" Hex	2.7 lbs (1.2 kg)

Heavy-Duty Truck Wrench

Use for off-the-road Budd-type wheels. Use **TR11** handle.
Stock: 1-1/4" (3.1 cm)

Model	EDP No.	Length	Socket size	Weight
TR10	34401	29-1/2" (75 cm)	1-3/4" Hex & 15/16" sq.	12.2 lbs (5.5 kg)
TR11	34402	30" (76 cm)		6.5 lbs (2.9 kg)



Wrench Support Stand

Commercial-duty stand used to support a double-end truck wrench, a 4-way lug wrench, or a torque wrench, when removing or replacing lug nuts.
Adjusts from 14-1/2" to 22-1/2" high.

Model	EDP No.	Weight
32610	32610	5.5 lbs (2.5 kg)

Dual Wheel Lug Stud Remover



Special self-tapping splines provide maximum grip to remove stripped lug studs. Use with **TR1, TR98** truck wrenches. Can also be used with open end wrench. Use with soft faced hammer.(see pg. 11)

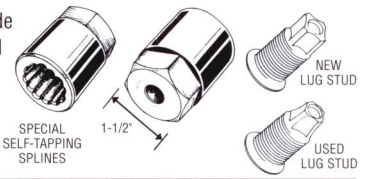

Model	EDP No.	Description	Weight
30165	30165	Fits 13/16" sq. inner nut	1 lb (.5 kg)

Power Wrench

Designed for dual nut systems. Has 13/16" sq. end to hold inner nut, with a 1-1/2" hex drive to spin outer nut off. Also adaptable to remove any nut size with a **TR55** adapter. 3 to 1 ratio provides mechanical power

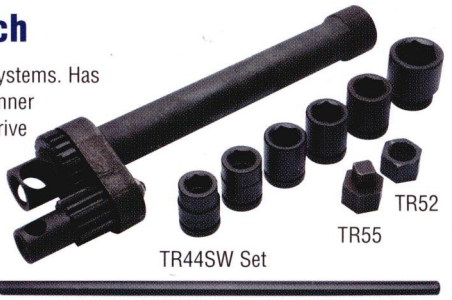

advantage necessary to remove any stubborn nut found on trucks, farm vehicles, buses, aircraft, and RV's. Tremendous power allows one man operation. Heat-treated portable components for extra strength. All sockets are 3/4" drive.

TR43 (34543) Basic Power Wrench Set

Weight: 19 lbs. (8.6 kg)
Set contains: **Power Drive**
TR45 20-1/2" (52 cm) Bar Hdle.
TR46 20" (51 cm) Tube Hdle.

TR44X (34545) Budd-Wheel Power Wrench Set

The 3/4 service adapter allows you to use any 3/4" drive socket.
Drive end is 1-1/2" hex. 13/16" square adapter for inner nut.
Weight: 20 lbs. (9.1 kg)
Set contains: **Power Drive**
TR45 20-1/2" (52 cm) Bar Hdle.
TR53 36" (91 cm) Tube Hdle.
TR52 13/16" Sq. Adapter
TR55 3/4" Service Adapter

TR44SW (34547) Universal Power Wrench Set

Weight: 29 lbs. (13.2 kg)
Set contains: **Power Drive**
Impact sockets:
S20 7/8" **S24** 1-1/8"
S21 15/16" **S25** 1-3/16"
S23 1-1/16" **S27** 1-1/2"
TR45 20-1/2" (52 cm) Bar Hdle.
TR53 36" (91 cm) Tube Hdle.
TR52 13/16" Square Adapter
TR55 3/4" Service Adapter

Shock Wrench

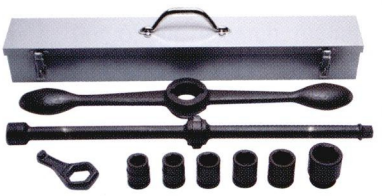



Shaft has 3/4" square drive end to accept 3/4" impact sockets and a 13/16" square socket. Heat-treated shaft for extra strength. Loosens or tightens stubborn lug nuts by 120° arc impact of arm rotating on shaft. Will not strip threads or bend lugs.

TR41 (34441) Standard Shock Wrench Set

Weight: 25.3 lbs. (11.5 kg)
Set contains: **Impact Sockets:**
S20 7/8" **S24** 1-1/8"
S21 15/16" **S25** 1-3/16"
S23 1-1/16" **S27** 1-1/2"
TR7 Handle
TR8 Shaft
TX9 Cap Nut Wrench
Metal box

TR42 (34442) Budd Wheel Shock Wrench Set

Weight: 23.5 lbs. (10.7 kg) (Not illustrated)
Set contains: **S27** 1-1/2" Impact socket
TR7 Handle
TR8 Shaft
TX9 Cap nut wrench
Metal box

MADE IN U.S.A.

Ken-Tool®

WARNING: Always wear safety goggles when using hand tools



Torque Master Torque Limiting Sockets

For foreign and domestic cars and light trucks. Tighten nuts to factory specifications each time the wheels are replaced. Color and letter coded for quick size and torque reference. Converts any impact gun including those with an extended anvil into an instant torque wrench by bleeding torque off the impact gun. Application chart can be wall mounted. (Application chart No. 30199, is also available separately.) One year warranty.

Four Piece Starter Kit

Set contains:
30181, 30183, 30185, 30189

Model	EDP No.	Weight
30174	30174	4.4 lbs (2.0 kg)



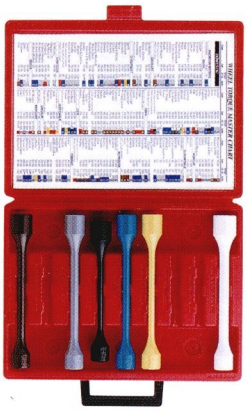

Six Piece Starter Kit

Set contains:
30181, 30183, 30184, 30185, 30186, 30189

Model	EDP No.	Weight
30176	30176	6.5 lbs (3.0 kg)

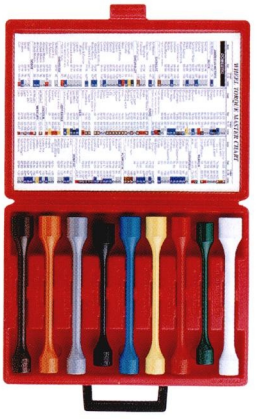

Nine Piece Kit

Set contains:
30181, 30182, 30183, 30184, 30185, 30186, 30187, 30188, 30189

Model	EDP No.	Weight
30179	30179	8.4 lbs (3.8 kg)

Four Piece Torque Stick Set for SUV's Most Popular Sizes for Largest Growing Market

For domestic and foreign SUV's. Tighten lug nuts to factory specifications. Color and letter coded for quick size and torque reference.

Set contains:

30181 - Brown (A) 100 ft/lbs.
30183 - Gray (C) 100 ft/lbs.
30200 - Aqua (Q) 140 ft/lbs.
30204 - Turquoise (BB) 150 ft/lbs.

Model	EDP No.	Weight
NEW 30175	30175	4.5 lbs (2 kg)

Four Piece Extension Kit for Passenger Car - 1/2" Drive

Extension kit to be used on passenger vehicles. Convert your own sockets into torque sockets.

Set contains:

30223 - Gray (C) 100 ft/lbs
30225 - Blue (E) 80 ft/lbs
30226 - Yellow (F) 65 ft/lbs
30229 - White (I) 120 ft/lbs

Model	EDP No.	Weight
30234	30234	3 lbs (1.3 kg)

Individual Sockets (1/2" Drive)

Model	Description	Socket Opening	Torque Limit	Weight
30181	Brown (A)	13/16"	100 ft / lbs	.5 lbs (.2 kg)
30182	Orange (B)	21 mm	80 ft / lbs	.5 lbs (.2 kg)
30183	Gray (C)	19 mm (3/4")	100 ft / lbs	.5 lbs (.2 kg)
30184	Black (D)	21 mm	60 ft / lbs	.5 lbs (.2 kg)
30185	Blue (E)	19 mm (3/4")	80 ft / lbs	.5 lbs (.2 kg)
30186	Yellow (F)	19 mm (3/4")	65 ft / lbs	.5 lbs (.2 kg)
30187	Red (G)	17 mm	80 ft / lbs	.5 lbs (.2 kg)
30188	Dark Green (H)	17 mm	55 ft / lbs	.5 lbs (.2 kg)
30189	White (I)	7/8"	120 ft / lbs	.5 lbs (.2 kg)
30195	Tan (J)	1"	140 ft / lbs	.5 lbs (.2 kg)
30196	Purple (K)	17 mm	110 ft / lbs	.5 lbs (.2 kg)
30197	Lt Green (L)	1"	170 ft / lbs	.5 lbs (.2 kg)
30198	Maroon (V)	1-1/16"	140 ft / lbs	.5 lbs (.2 kg)
30200	Aqua (Q)	7/8"	140 ft / lbs	.5 lbs (.2 kg)
30201	Lime Green (T)	15/16"	135 ft / lbs	.5 lbs (.2 kg)
30202	Lt. Blue (Y)	22 mm	100 ft / lbs	.5 lbs (.2 kg)
30203	Beige (Z)	7/8"	65 ft / lbs	.5 lbs (.2 kg)
30204	Turquoise (BB)	21 mm	150 ft / lbs	.5 lbs (.2 kg)
30199	Application Chart			

Individual Heavy-Duty Truck Torque Extensions

Convert your own sockets into torque sockets for use on commercial, heavy-duty trucks, and buses.

Model	Description	Drive Size Socket/Opening	Torque Limit	Weight
30230	Yellow (O)	3/4 "	175 ft / lbs	.75 lbs (.3 kg)
30231	Yellow (N)	3/4 "	250 ft / lbs	.75 lbs (.3 kg)
30232	Yellow (U)	3/4 "	350 ft / lbs	.75 lbs (.3 kg)
30233	Yellow (M)	3/4"	475 ft / lbs	.75 lbs (.3 kg)
30236	Yellow (T)	1"	175 ft / lbs	1 lb (.5 kg)
30237	Yellow (R)	1"	250 ft / lbs	1 lb (.5 kg)
30238	Yellow (S)	1"	350 ft / lbs	1 lb (.5 kg)
30239	Yellow (P)	1"	475 ft / lbs	1 lb (.5 kg)
30240	Yellow (W)	1"	650 ft / lbs	1 lb (.5 kg

WARNING: Torque sockets and truck torque extensions cannot be used to take off wheel nuts. Calibrate your impact gun and follow all manufacturers' recommended procedures when using Torque Master products.

No-Mar Rim Guard

Protective cover prevents damage to chrome and aluminum rims and wheels when removing or replacing lug nuts. Imprinted with torque sequence number for proper torquing of disc wheels.





Model	EDP No.	Description	Weight
30605	30605	Protective plastic cover	.5 lbs (.2 kg)

Cap Nut Wrenches

Ken-Tool *Porkchop™*

Wrenches hold outer cap nut on dual wheels while the inner nut is turned. Lip fits in hole to secure wrench in place. Sizes offered fit standard and metric cap nuts.

Model	EDP No.	Description	Size	Weight
TX9®	30609	SAE	1-1/2"	.4 lbs (.1 kg)
TX10	30610	Metric	35 mm	.4 lbs (.1 kg)
TX12	30612	Metric	41 mm	.4 lbs (.1 kg)

Combination Cap Nut Wrench

Offers the versatility of two wrenches in one unique product design. Fit one end onto the outer cap nut with the other end through the center hole. Wrench slides underneath center disc of wheel reducing slipping during nut removal.

Model	EDP No.	Description	Size	Weight
TX50	30620	SAE & Metric	41 mm, 1-1/2"	1.3 lbs (1.0 kg)

Heavy-Duty Cap Nut Wrenches

Heavy-duty design will not slip out of position. Wrench rests snugly against the center hole reducing the possibility of rim damage. Ideal for aluminum wheels.

Patent no. D446,429

Model	EDP No.	Description	Size	Weight
TX200	30618	SAE	1-1/2"	2.6 lbs (1.2 kg)
TX241	30619	Metric	41 mm	2.6 lbs (1.2 kg)

Bead-Breaking Tools Truck / Farm / OTR



33341

These lightweight, portable tools are a great alternative to handled bead breaking wedges or hydraulic bead breakers. One end is used to remove frozen or rusted beads from all types of rims. On the T52, the other end can be used as a leverage bar when inserted into the 35695 or 35697 Truck Lug Wrench.

Swan Neck Leverage Bar

Model	EDP No.	Length	Stock	Weight
T41	33341	30" (76 cm)	7/8" (22 mm)	5.3 lbs (2.4 kg)

30" Bead Breaker

Model	EDP No.	Length	Stock	Weight
T42	33342	30" (76 cm)	7/8" (22 mm)	4.8 lbs (2.2 kg)

Bead Breaker Leverage Bar



Also for use with the T95 wrenches.

Model	EDP No.	Length	Stock	Weight
T52	34652	33" (84 cm)	7/8" (22 mm)	5.5 lbs (2.5 kg)

Portable Bead Breaker

Portable bead-breakers are great for custom wheels and foreign wheels. They break beads on most sizes of passenger tires and light trucks.

Model	EDP No.	Handle Length	Weight
T100	34670	36" (91 cm)	5.2 lbs (2.3 kg)

Bead-Breaking Tool / Driving Iron

Driving iron is used for loosening rusted truck and bus beads. Will speed truck tire repair work and save labor and time.

Model	EDP No.	Length	Stock	Weight
T26A	32126	11-3/4" (30 cm)	1-1/4" (32 mm)	4.4 lbs (2.0 kg)

Impact Bead Breakers

Bead breaker loosens beads with bead-breaking foot and ram bar, but never cuts the bead of the tire. The wedge foot is forced between the bead and rim flange. Breaker is designed for shop or road use. No other bead breaking tools are necessary.

Model	EDP No.	Description	Length	Length Extended	Weight
T24B	35924	Economy	46" 117 cm	72" 183 cm	13.5 lbs 6.1 kg

T26B has exclusive spring action design to reduce user fatigue associated with slide hammer kickback.



Model	EDP No.	Description	Length	Length Extended	Weight
T26B	35926	Heavy-duty	50" 127 cm	80" 203 cm	23 lbs 10.4 kg

Floor Type Bead Breakers

Ideal for stubborn tires. Use to prevent the bending of wheels. A great solution for custom and foreign wheels.

Model	EDP No.	Description	Tread Width	Weight
T99B	35999	Standard	up to 8" (20 cm)	28.5 lbs (12.9 kg)



Model	EDP No.	Description	Tread Width	Weight
T98	35998	Deluxe	up to 11" (28 cm)	29.8 lbs (13.5 kg)

WARNING: Always wear safety goggles when using hand tools

Lock Ring Tools

These tools are designed to remove most truck lock rings. A must-have for anyone mounting or demounting multi-piece rims. Use in pairs.





Truck Lock Ring Remover

Designed for smaller diameter wheels.

Model	EDP No.	Length	Stock	Weight
T23®	32123	24" (61 cm)	11/16" (17.5 mm)	2.4 lbs (1.0 kg)



Truck Lock Ring Remover

Designed for smaller diameter wheels.

Model	EDP No.	Length	Stock	Weight
T23A®	33223	30" (76 cm)	11/16" (17.5 mm)	3.1 lbs (1.4 kg)

Combination Rim / Ring Tool

Flat tapered end ideal for all around ring and rim work.

Model	EDP No.	Length	Stock	Weight
T23B	33224	23-1/2" (60 cm)	11/16" (17.5 mm)	2.4 lbs (1.0 kg)



Rim Lock Tool

For servicing wide base rims.

Model	EDP No.	Length	Stock	Weight
T25	32125	18" (46 cm)	11/16" (17.5 mm)	1.8 lbs (.8 kg)

Special Lock Ring Tool

Long tapered curved end for continuous side rings.

Model	EDP No.	Length	Stock	Weight
T27	32127	18" (46 cm)	11/16" (17.5 mm)	1.8 lbs (.8 kg)

Lock Ring Tool

Removes continuous side rings on two-piece truck rims.

Model	EDP No.	Length	Stock	Weight
T27A	32128	18" (46 cm)	11/16" (17.5 mm)	1.8 lbs (.8 kg)

Heavy-Duty Lock Ring Tool



Use for multi-piece wheels, especially hub type.

Model	EDP No.	Description	Length	Stock	Weight
T48A	34648	Heavy-Duty	37" (94 cm)	3/4" (19 mm)	4.6 lbs (2.1 kg)

Small Tire Mount/Demount Irons

New designs are based on popular European styles. Extended length of the flat curved sliding surface provides mounting ability comparable to much longer traditional tire irons. Sizes available for motorcycle, passenger, truck, and heavy-duty tires. Designed for mounting and demounting tires. Best if used in pairs.



Motorcycle / Small Wheel

Model	EDP No.	Length	Stock	Weight
T43A	39805	15" (38 cm)	3/4" (19 mm)	1.8 lbs (.8 kg)

Tire Irons - Small Tire

T9A

T16A

Pro tire changing tools for small tires. Ideal for mounting and demounting motorcycle, ATV, lawn tractor, golf cart, and small tires by hand. Rounded ends will not pinch tube.

Model	EDP No.	Length	Stock	Weight
T9A	32109	9" (23 cm)	7/16" (11 mm)	.4 lbs (.16 kg)
T16A	32116	16" (41 cm)	7/16" (11 mm)	.7 lbs (.3 kg)
T9C	32110	2 pc. Carded Set - Contains 2 T9A 9" Bars		
T16C	32117	2 pc. Carded Set - Contains 2 T16A 16" Bars		

Mount / Demount Tire Tools - Small Tire

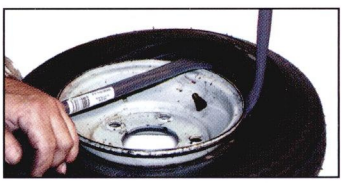

Tools are used in pairs to mount or demount small passenger, industrial, ATV, and motorcycle tires.

Model	EDP No.	Length	Stock	Weight
T6A	32106	16-1/2" (42 cm)	5/8" (16 mm)	1.5 lbs (.7 kg)

Center Post Tire Tool

"Slik-Stik" works on most center-post tire changers to mount or demount tires. Tool can be used for all 12" to 17" full or semi-drop center wheels.

Model	EDP No.	Length	Stock	Weight
T143A	34660	38" (97 cm)	1" square	5.2 lbs (2.3 kg)

Super Single Tire Mount / Demount Tool

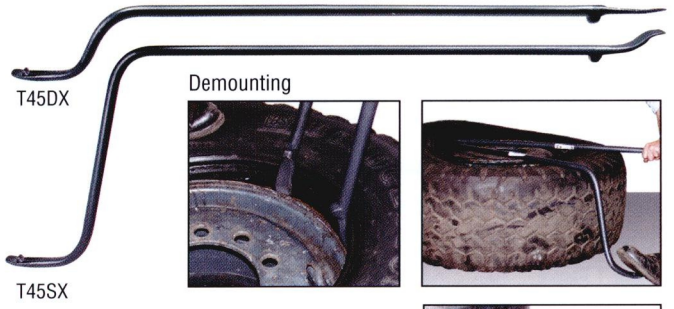

Demounting

Design allows you to reach inside the deep well of the tire to pull the bead over the rim. Patented one-piece manufacturing process assures long life and superior performance. Use with **T45DX**. Use on 16.5" x 22.5" duplex and rear tractor tires.

Model	EDP No.	Length	Stock	Weight
T45SX	34945	50" (127 cm)	7/8" (22 mm)	9.3 lbs (4.2 kg)

U.S. Patent No's 348,595 and 5,343,921

Use on 16.5" x 22.5" duplex and 25" solid wheel loader tires. Patented one piece manufacturing process assures long life and superior performance. Use with **T45SX**.

Model	EDP No.	Length	Stock	Weight
T45DX	34946	50" (127 cm)	7/8" (22 mm)	8.5 lbs (3.9 kg)

U.S. Patent No's 348,595 and 5,343,921

European Style Tools

Use on car, motorcycle, truck, and agricultural tires. Designed for mounting and demounting tires. Best if used in pairs.

Model	EDP No.	Length	Stock	Weight
T43C	39806	21" (53 cm)	7/8" (22 mm)	3.1 lbs (1.4 kg)

Model	EDP No.	Length	Stock	Weight
T43D	39810	30" (76 cm)	7/8" (22 mm)	4.5 lbs (2.0 kg)

Model	EDP No.	Length	Stock	Weight
T44	39808	31" (79 cm)	7/8" (22 mm)	5.3 lbs (2.4 kg)

T44 illustration





Cross Reference:

Ken-Tool No.	T43A	T43C	T43D	T44	T45SX	T45DX	T41
CPM	Livraison Ref. 1547	Face 68 Ref.426/68	Force Ref. 1289	Halte Ref. 1060	Hyoca Ref. 1194	Hyude Ref. 1195	Sayam Ref. 858

Bead Holding Device

Holds the bead in place against the wheel when mounting the tire on to the wheel. Not a prying device.

Model	EDP No.	Description	Weight
31710	31710	Solid Brass	1.4 lbs (.6 kg)

Tubeless Tire Irons & Sets

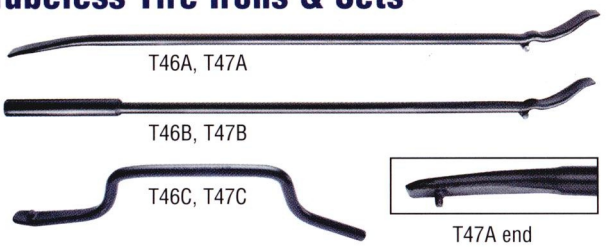

T47A end

Sets provide all irons necessary for a variety of tire changing applications. Use "C" bar with the "B" extension bar for easier use on large, wide-base truck tires. Use on standard and large truck tires, including industrial, farm, buses, and tractors.

Standard

Model	EDP No.	Description	Length	Stock	Weight
T46	34746	**Tire Iron Set** includes: T46A,T46B,T46C		3/4" 19 mm	12 lbs 5.4 kg
T46A	34747	Straight Mount/Demount Tool	36" 91 cm	3/4" 19 mm	4.5 lbs 2.0 kg
T46B	34748	Straight Mount/Demount Tool "B" Extension for T46C	36" 91 cm	3/4" 19 mm	4.5 lbs 2.0 kg
T46C	34749	Offset Mount "C" Bar	22" 56 cm	3/4" 19 mm	3 lbs 1.4 kg

Heavy-Duty

Model	EDP No.	Description	Length	Stock	Weight
T47	34846	**Tire Iron Set** includes: T47A,T47B,T47C		1" 25 mm	29 lbs 13.1 kg
T47A	34847	Straight Mount/Demount Tool	52" 132 cm	1" 25 mm	11 lbs 5.0 kg
T47B	34848	Straight Mount/Demount Tool "B" Extension for T47C	49-1/2" 126 cm	1 " 25 mm	11 lbs 5.0 kg
T47C	34849	Offset Mount "C" Bar	27" 69 cm	1" 25 mm	6.6 lbs 3.0 kg

Mounting



Demounting

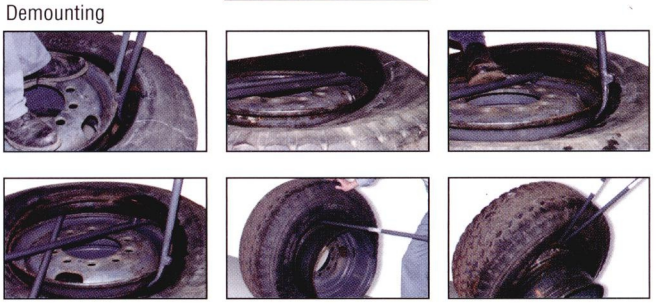

Aluminum Wheel Protector

Save expensive rims from damage during manual tire changing. Prevents tire tools from marring or scratching aluminum or steel rims when using Ken-Tool's manual tire changing tools. Durable leather protector fits on the rim and protects inside of the rim well. Use with an assortment of tire tools including: T45A® - style tire irons, Serpent™, tire spoons, other Ken-Tool tire changing tools. When one end wears out, flip it over and use the opposite end. Great for roadside service or in the shop.

Patent Pending



Model	EDP No.	Description	Weight
31810	31810	Leather	.35 lbs (.15 kg)

NEW

WARNING: Always wear safety goggles when using hand tools

MADE IN U.S.A.

Tire Mount / Demount Spoons

These tools are designed for fast and efficient tire changing. Use the 18" and 24" spoons to mount or demount passenger car, motorcycle, ATV, and light truck tires. The 30" spoons provide enough strength and leverage to work on large truck, bus, off-road vehicle, tractor, and aircraft tires.





Straight

Model	EDP No.	Length	Stock	Weight
T1X	32101	18" (46 cm)	11/16" (17.5 mm)	1.8 lbs (.8 kg)
T19	32119	24" (61 cm)	11/16" (17.5 mm)	2.5 lbs (1.1 kg)
T19A	33219	30" (76 cm)	11/16" (17.5 mm)	3 lbs (1.4 kg)
T38	33238	30" (76 cm)	7/8" (22 mm)	4.8 lbs (2.2 kg)

Drop-Center

Model	EDP No.	Length	Stock	Weight
T21R	32121	18" (46 cm)	11/16" (17.5 mm)	1.8 lbs (.8 kg)
T21F	34121	24" (61 cm)	11/16" (17.5 mm)	2.5 lbs (1.1 kg)
T21HD	34122	30" (76 cm)	7/8" (22 mm)	4.5 lbs (2.0 kg)

Curved

Model	EDP No.	Length	Stock	Weight
T2X	32102	18" (46 cm)	11/16" (17.5 mm)	1.8 lbs (.8 kg)
T20	32120	24" (61 cm)	11/16" (17.5 mm)	2.4 lbs (1.1 kg)
T20A	33220	30" (76 cm)	11/16" (17.5 mm)	3.1 lbs (1.4 kg)
T39	33239	30" (76 cm)	7/8" (22 mm)	4.5 lbs (2.0 kg)

Tubeless Truck Tire Mount / Demount Irons

Ken-Tool manufactures the largest and most diverse selection of tire mount/demount irons in the world. From the **T45A-2000K™** for standard truck tires, to the **T45SX** and **T45DX** for wide-base Super Singles, Ken-Tool makes a tire iron for all your tire changing needs. Use on truck, agricultural, and industrial tires. Patented one-piece manufacturing process and design assures long life and superior performance. Heat-treated for strength. Three sizes for many service needs. Use in pairs. **T45A®** is a registered trademark of Ken-Tool. U.S. Patent No's 348,595 and 5,343,921.

Standard & Heavy Duty T45A® Style Tubeless Tire Irons



Design allows for less effort, provides excellent wheel/rim surface contact area for less side to side movement. Improved blade and knob design. Tip on one end for 'grabbing' the rim.

Model	EDP No.	Length	Stock	Weight
T45A-2000K™	34644	38" (96 cm)	3/4" (19 mm)	5 lbs (2.2 kg)

Ken-Tools' original design offers one piece construction, and assures long life for applications.

Model	EDP No.	Length	Stock	Weight
T45A®	34645	37" (94 cm)	3/4" (19 mm)	4.6 lbs (2.1 kg)
T45HD	34647	41" (104 cm)	7/8" (22 mm)	7 lbs (3.2 kg)
T47A	34847	52" (132 cm)	1" (25 mm)	11 lbs (5.0 kg)









Serpent™ Tire Changing System

Demount Tool

"Makes demounting easier than ever." Demounts **both** beads on most truck tires without the need for lifting the tire/wheel assembly off the ground, and then dropping it.

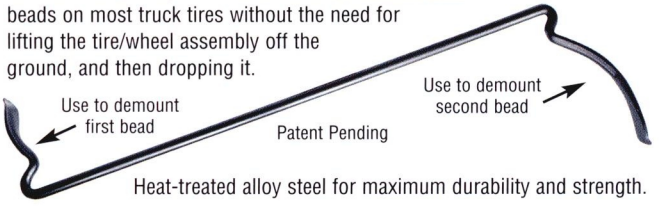

Heat-treated alloy steel for maximum durability and strength.



Model	EDP No.	Length	Stock	Weight
T2001	35449	39" (99 cm)	3/4" (19 mm)	6.5 lbs (3 kg)

Mounting Tool

"Makes mounting easier than ever."
Wing shape is designed to stop against the rim, and then remove itself effortlessly from between the rim and bead. The small end of the tool easily gets under the stretched bead for that last pull.

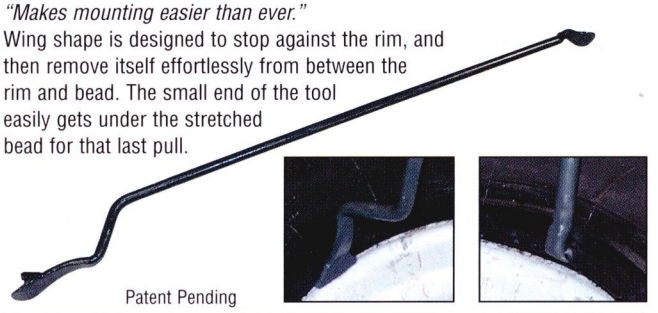

Model	EDP No.	Length	Stock	Weight
T2002	35450	38" (96 cm)	11/16" (17.5 mm)	4 lbs (1.8 kg)

Serpent™ 3 Pc. Tire Changing Set

Everything you need to change tires easily and effortlessly.
Takes the struggle out of mounting and demounting truck tires.

Set No. 35453
Weight: 12 Lbs. (5.4 kg)

Demount Tool
T2001 (35449)

Mount Tool
T2002 (35450)

Bead Holding Device
31710

General Purpose Tire Hammers

Designed for tire service in a variety of sizes and styles.
Use rubber head replacement **T11RH (35104)**.

Wood Handled



Model	EDP No.	Handle No.	Length	Weight
T11B	35311	T11BH	14-1/2" (37 cm)	4.5 lbs (2.0 kg)

Model	EDP No.	Handle No.	Length	Weight
T11R	35313	T11HN	14" (36 cm)	2.8 lbs (1.2 kg)



Model	EDP No.	Handle No.	Length	Weight
T33R	35317	T11HN	14" (36 cm)	2.3 lbs (1.0 kg)

Fiberglass Handled



Model	EDP No.	Handle No.	Length	Weight
TG11B	35411	TG11BH	16" (41 cm)	4.8 lbs (2.1 kg)



Model	EDP No.	Handle No.	Length	Weight
TG11R	35413	TG31H	16" (41 cm)	2.9 lbs (1.3 kg)



Model	EDP No.	Handle No.	Length	Weight
TG33R	35417	TG31H	16" (41 cm)	2.5 lbs (1.1 kg)

Heavy Duty Tire Hammers

Hammers are used for mounting and demounting tires. They make tire changing faster and easier for passenger car, truck, bus, farm tractor, and aircraft tires. A variety of weights and sizes are offered to meet all your tire changing needs. Non-marring rubber end can be used for driving on lock rings.
Use rubber head replacement **T34RH (35105)**.

Wood Handled

Model	EDP No.	Handle No.	Length	Head Weight	Weight
T34	35321	T11CH	17" 43 cm	4.8 lbs 2.2 kg	5.4 lbs 2.4 kg

Model	EDP No.	Handle No.	Length	Head Weight	Weight
T35	35323	T11CH	16-1/2" 42 cm	5.5 lbs 2.5 kg	6.1 lbs 2.7 kg

Model	EDP No.	Handle No.	Length	Head Weight	Weight
T36	35325	T11CH	16-1/2" 42 cm	5.8 lbs 2.6 kg	5.3 lbs 2.4 kg

Fiberglass Handled



Model	EDP No.	Handle No.	Length	Head Weight	Weight
TG34	35421	TG11CH	18" 46 cm	5.5 lbs 2.5 kg	6 lbs 2.7 kg



Model	EDP No.	Handle No.	Length	Head Weight	Weight
TG35	35423	TG11CH	18" 46 cm	4.8 lbs 2.2 kg	6.6 lbs 3.0 kg



Model	EDP No.	Handle No.	Length	Head Weight	Weight
TG36	35425	T11CH	18" 46 cm	5.8 lbs 2.6 kg	6 lbs 2.7 kg

Replacement Handles

Top Quality U.S. Hickory Replacement Handles

Model	EDP No.	For Hammer No.	Length	Weight
T11BH	35111	T11B	15" (38 cm)	.75 lbs (.3 kg)
T11HN	35113	T11R, T31, T33R	15" (38 cm)	.75 lbs (.2 kg)
T11CH	35119	T11C, T34, T35, T36	17" (43 cm)	.75 lbs (.3 kg)
T11DH	35127	T11D	17" (43 cm)	.75 lbs (.3 kg)
T11EH	35129	T11E®	30" (76 cm)	1.2 lbs (.5 kg)

Aluminum Replacement Handle

Model	EDP No.	For Hammer No.	Length	Weight
T11AH	35529	T11E®, TG11E	32" (81 cm)	4.3 lbs (2 kg)

Polymer Replacement Handle Patented

Model	EDP No.	For Hammer No.	Length	Weight
T11KH	35230	T11K™	32" (81 cm)	2.3 lbs (1.0 kg)

Fiberglass Replacement Handles

Model	EDP No.	For Hammer No.	Length	Weight
TG31H	35206	TG11R, TG31, TG33R	16" (41 cm)	1 lb (.5 kg)
TG11BH	35211	TG11B	16" (41 cm)	1.3 lbs (.6 kg)
TG11CH	35219	TG11C, TG34, TG35, TG36	18" (46 cm)	2.5 lbs (1.1 kg)
TG11DH	35227*	TG11D	18" (46 cm)	1.2 lbs (.5 kg)
TG11EH	35229*	TG11E	32" (81 cm)	2.3 lbs (1.0 kg)

* Nulok adapter (others use epoxy).

Epoxy Kits

Model	EDP No.	Description	For Hammer No.
T12B	35201	Epoxy Kit	TG11B, TG11R, TG31, TG33R
T12D	35202	Epoxy Kit	TG34, TG35, TG36, TG37

WARNING: Always wear safety goggles when using hand tools

Duck-Billed Bead Breaking Wedges

Our most popular bead breakers.

T11D

T11E®

Wood Handled

Model	EDP No.	Handle No.	Length	Weight
T11D	35327	T11DH	17" (43 cm)	4.8 lbs (2.2 kg)
T11E®	35329	T11EH	30" (76 cm)	9.2 lbs (4.2 kg)

TG11D

TG11E

Fiberglass Handled

Model	EDP No.	Handle No.	Length	Weight
TG11D	35427	TG11DH	18" (46 cm)	4.8 lbs (2.2 kg)
TG11E	35429	TG11EH	32" (81 cm)	9.1 lbs (4.1 kg)

Polymer Handled

Hump Design prevents tool from wedging between rim and bead. Breaks the bead with little or no prying. New polymer handle design for longer lasting everyday use. Full length fiberglass core for greater strength. Coating on handle provides durability.

Patented

Handle cross section

Model	EDP No.	Replacement Handle	Length	Head Weight
T11K™	35460	T11KH (35230)*	32" (81 cm)	10.5 lbs (4.8 kg)

*New handle design T11KH (35230) will not work with old style T11E head

Double-Face Sledge Hammers

High carbon steel, heat treated. Machined, polished face.

84H-4

Top Grade U.S.Hickory Handle

Model	EDP No.	Length	Face	Eye Size	Head Weight
84H-2	37302	15"	1-1/2"	3/4" x 1"	2 lbs (.9 kg)
84H-4	37304	15"	1-3/4"	3/4" x 1"	4 lbs (1.8 kg)
84H-8	37308	32"	2"	1" x 1-3/8"	8 lbs (3.6 kg)
84H-10	37310	36"	2-1/8"	1" x 1-3/8"	10 lbs (4.5 kg)
84H-12	37312	36"	2-1/8"	1" x 1-3/8"	12 lbs (5.4 kg)
84H-16	37316	36"	2-3/8"	1" x 1-3/8"	16 lbs (7.2 kg)
84H-20	37320	36"	3"	2" x 1.5"	20 lbs (9.0 kg)

84G-10

Premium Fiberglass Handle

Model	EDP No.	Length	Face	Eye Size	Head Weight
84G-4	37404	15"	1-3/4"	3/4" x 1"	4 lbs (1.8 kg)
84G-8*	37408	32"	2"	1" x 1-3/8"	8 lbs (3.6 kg)
84G-10	37410	36"	2-1/8"	1" x 1-3/8"	10 lbs (4.5 kg)
84G-12	37412	36"	2-1/8"	1" x 1-3/8"	12 lbs (5.4 kg)

* Supersedes TG37 (35431)

2 lb. Rubber Mallet

Rubber head minimizes marring surfaces.

Model	EDP No.	Handle Length	Head Weight
T32	35310	17"	2 lbs (.9 kg)

Cross-Pein / Blacksmith Hammer

High carbon steel with machine polished face.

Top Grade U.S.Hickory Handle

Model	EDP No.	Length	Face	Eye Size	Head Weight
85H-3	37103	16"	1-5/8"	1 x 1-3/4"	3 lbs (1.4 kg)

Premium Fiberglass Handle

Model	EDP No.	Length	Face	Eye Size	Head Weight
85G-3	37113	16"	1-5/8"	1 x 1-3/4"	3 lbs (1.4 kg)

New England Pattern Hand-Drilling Hammers

Top grade U.S. hickory handle.

80H-4

Model	EDP No.	Length	Face	Eye Size	Head Weight
80H-3	37003	10-1/2"	1-1/2"	1 x 3/4"	3 lbs (1.4 kg)
80H-4	37004	10-1/2"	1-5/8"	1 x 3/4"	4 lbs (1.8 kg)

Tire Knockers

Model	EDP No.	Length	Weight
35110	35110	18" (46 cm)	.7 lbs (.3 kg)

Dead Blow Hammers

Head is shot filled for maximum force with no bounce effect. Safest non-marring, non-sparking hammers available. Great for tire changing and general shop use. High quality materials to withstand years of hard use.

T335

T336

Economy Strike Pro®

Dead blow action in high visibility colors.

Model	EDP No.	Color	Length	Nominal Weight
T335	35335	Safety Yellow	12" (31 cm)	1 lb (.5 kg)
T336	35336	Safety Orange	12" (31 cm)	1.5 lbs (.7 kg)

TG332

TG337 Steel face

Professional Dead Blow

Power-drive fiberglass handle gives 20% more driving power, yet reduces user fatigue. One-pound dead blow hammer is especially useful for truck wheel weights.

Model	EDP No.	Description	Length	Nominal Weight
TG331	35331	1 lb Head (.5 kg)	12-1/4" (31 cm)	1.8 lbs (.8 kg)
TG332	35332	2 lb Head (.9 kg)	13-1/2" (34 cm)	1.9 lbs (.9 kg)
TG333	35333	3 lb Head (1.4 kg)	14-1/2" (37 cm)	2.7 lbs (1.2 kg)
TG334	35334	4 lb Head (1.8 kg)	15-1/2" (40 cm)	3.4 lbs (1.5 kg)
TG337	35337	Steel Face / Soft Face	13-1/2" (34 cm)	2.2 lbs (1.0 kg)

WARNING: Always wear safety goggles when using striking or struck tools. Never use one hammer to strike another hammer. Never use a tool with a loose or damaged handle. Discard any striking or struck tool if tool shows dents, cracks, chips, or mushrooming.

Professional Chrome Lug Nut Cover Remover

Special coating will not scratch or damage chrome, painted, or coated lug nut covers.

Model	EDP No.	Weight
30606	30606	1.3 lbs (.6 kg)

Tire Bead Seaters

One-piece rubber tube for mounting hard-to-seat radial, bias-belted, or conventional truck tires. As tire is inflated, the lubricated bead seater forms a seal between the rim and tire, allowing the air pressure to force the beads into the rim flange. As proper pressure is reached, the bead seater slides out and over the rim. Use bead lubricant with bead seaters.

Passenger / Light Truck

Model	Fits Rim Sizes	Weight
31446	14-15" (36 - 38 cm)	1.5 lbs (.7 kg)

Truck

Model	Fits Rim Sizes	Weight
31437	16-1/2" to 17-1/2" (42 to 45 cm)	2 lbs (.9 kg)
31438	19-1/2" (50 cm)	2.3 lbs (1.0 kg)
31439	22-1/2" to 24-1/2" (57 to 62 cm)	2.3 lbs (1.0 kg)

Pneumatic Bead Expanders

Expanders fit most bias ply passenger tires. A pliable neoprene rubber tube is encased in a tough, long-lasting nylon cover. Expanders slip easily over tire and withstand contact with oil, grease, solvents, and acids. Follow instructions included with tool. Use on bias ply, 14", 15", 70-series tires and larger. Expands bead by compressing tread. **T132** for belted bias ply tires, includes over-pressure release valve. **T133** for standard bias ply tires.



Model	EDP No.	Min / Max Diameter	Tube Diameter	Weight
T132	31432	24 - 34" (61 - 86 cm)	2-1/4" (6 cm)	2.8 lbs (1.2 kg)
T133	31433	22 - 32" (60 - 81 cm)	3/4" (2 cm)	.75 lbs (.3 kg)

Professional Tire Tool and Lug Wrench Merchandisers

Ken-Tool offers a simple, yet effective way to merchandise our top products. Both assortments come complete with a sturdy, free-standing wire rack (no assembly required), and an assortment of our top-selling tools. The graphics on the front of the rack let your customer know they're buying professional quality tire tools and lug wrenches from Ken-Tool while the user-friendly design of the rack lets you know you found the solution to displaying Ken-Tool products. Call us today for complete product and merchandiser information.

Tire & Wheel Service Center No. 36046

Deluxe Tire & Wheel Service Center No. 36045

Wheel Cover & Wheel-Lock Removal Kit

Remove and replace GM, Ford, Chrysler hubcap locks and aftermarket wheel lug locks without the factory issued key. Save time! Will not damage the lock or stud.

Model	EDP No.	Weight
30170	30170	2.5 lbs (1.1 kg)

Deep, Thin Wall Flip Socket



1/2" square drive, black impact socket is deep and thin walled to reach areas conventional sockets won't. Flip socket provides two socket sizes which cover virtually all SAE automotive wheel lug sizes.

Model	EDP No.	Socket Sizes	Drive	Weight
30156	30156	3/4", 13/16"	1/2" square	.4 lbs (.18 kg)
30158	30158	19 mm, 21 mm	1/2" square	.4 lbs (.18 kg)

Universal Emergency Wheel-Lock Remover

Removes wheel locks when the key is lost or misplaced. Tapered socket fits over most car wheel locks. Use soft-faced hammer to drive onto wheel lock. Limited use.

Model	EDP No.	Drive	Weight
30161	30161	1/2"	1 lb (.5 kg)

Heavy-Duty Impact Sockets

Special Purpose Impact Sockets Off-Road Budd, Square, SAE, and Metric

Special 1-1/2" hex deep heavy-duty impact socket designed for outer cap nuts on Budd-style truck wheels. The 1-1/2" hex depth is limited to help prevent socket contact with the wheel. The socket is deep style to eliminate contact with the inner cap nut.

3/4" Drive		1" Drive		
Model	Description	Model	Description	Weight
30120	13/16" square	30149	13/16" square	1.4 lbs (.6 kg)
●30352	21 mm square	●30362	21 mm square	1.1 lbs (.5 kg)

Combination Budd Wheel - SAE and Metric

3/4" Drive		1" Drive		
Model	Description	Model	Description	Weight
30121	1-1/2" x 13/16" square	30150	1-1/2" x 13/16" square	3.1 lbs (1.4 kg)

Deep Length Impact Sockets - SAE and Metric

6 point, 3/4" Drive		6 point, 1" Drive		
Model	Description	Model	Description	Weight
30356	33 mm deep	30366	33 mm deep	1.6 lbs (.7 kg)

WARNING: Always wear safety goggles when using hand tools

Socket Sets

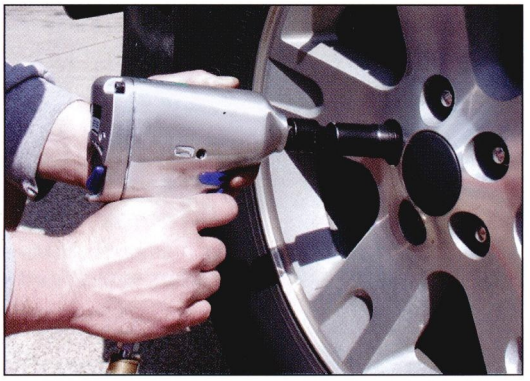

Three Piece Thinwall Flip Socket Set

One end is a standard 6-point socket for everyday use.
Flip socket over and you have a 6-point socket of larger size.

Socket sizes:
- 19mm - 21mm socket
- 3/4" - 13/16" socket
- 3" extension, 1/2" drive

Model	EDP No.	Drive	Weight
NEW 30110	30110	1/2"	1.2 lbs (.54 kg)

Six Piece Double-Duty Flip Socket Set

One end is a standard 6-point socket for everyday use.
Flip socket over and you have a 6-fluted twist socket for removing damaged or rounded wheel lugs.

Socket sizes:
- 17mm socket
- 13/16" socket
- 19mm, 3/4" socket
- 7/8" socket
- 21mm socket
- 3" extension

Model	EDP No.	Drive	Weight
NEW 30111	30111	1/2"	2.8 lbs (1.2 kg)

Six Piece Thick and Thin Flip Socket Set

For those ever changing aftermarket and manufacturers' wheels.
One end is a standard 6-point socket for everyday use.
Flip socket over and you have a thinwall socket of the same size for wheels with minimal clearance.

Socket sizes:
- 17mm socket
- 13/16" socket
- 19mm, 3/4" socket
- 7/8" socket
- 21mm socket
- 3" extension

Model	EDP No.	Drive	Weight
NEW 30112	30112	1/2"	3 lbs (1.3 kg)

Six Piece Deep Thinwall Impact Socket Set

For For the difficult aftermarket and manufacturers' wheels.

Socket sizes:
- 17mm socket
- 13/16" socket
- 19mm, 3/4" socket
- 7/8" socket
- 21mm socket
- 3" extension

Model	EDP No.	Drive	Weight
NEW 30113	30113	1/2"	3 lbs (1.3 kg)

Five Piece Double-Duty Oil Drain Plug Removal Flip Socket Set

One end is a standard 6-point socket for everyday use.
Flip socket over and you have a twist socket damaged oil drain plug remover of the same size.

Socket sizes:
- 14mm socket
- 17mm socket
- 15mm socket
- 19mm, 3/4" socket
- 16mm, 5/8" socket

Model	EDP No.	Drive	Weight
NEW 30114	30114	3/8"	3 lbs (1.3 kg)

Three Piece Lug and Lock Flip Socket Set

One end is a standard 6-fluted twist socket for removing damaged wheel lugs.
Flip socket over and you have a 12-fluted twist socket for removing wheel locks.

Socket sizes:
- 19mm, 3/4" socket
- 7/8" socket
- 3" extension

Model	EDP No.	Drive	Weight
NEW 30115	30115	1/2"	1.6 lbs (.7 kg)

Five Piece Deep Twist Socket Set

Easily removes rounded, damaged, or corroded nuts, bolts, pipe nipples and studs.
Convenient storage/organizer bar.

Socket sizes:
- 19mm, 3/4" socket
- 15/16" socket
- 13/16" socket
- 1" socket
- 7/8" socket

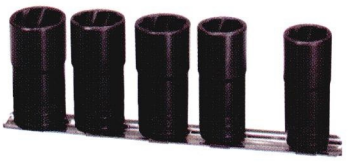

Model	EDP No.	Drive	Weight
NEW 30116	30116	1/2"	2.5 lbs (1.1 kg)

MADE IN U.S.A.

Tire Spreaders

Tire Spreader with Lock Pin



Model	EDP No.	Spread Capacity	Weight
T51	31551	4"- 6" (10-15 cm)	3.9 lbs (1.7 kg)

Tire Spreader



Model	EDP No.	Spread Capacity	Weight
T53	31553	7-1/2" (19 cm)	3 lbs (1.4 kg)

Ratchet Action Truck Tire Spreader



Model	EDP No.	Spread Capacity	Weight
T54	31554	3-1/2" - 14" (9 - 36 cm)	7.3 lbs (3.3 kg)

Hand Wire Brush

Cleans rust from rims and wheels.

Model	EDP No.	Length	Weight
T15	30515	14" (36 cm)	5 oz. (.2 kg)

"Challenger" Wheel Balancer

Accurate, easy-to-operate, self-leveling balancer with easy-to-read circular level accurately balances all wheels when using regular weights. Bubble type balancer is portable and may be used indoors or outdoors, even on a stone driveway. Convenient built-in weight storage space in the base of the balancer combines everything needed in 2 sq. ft. of floor space. All steel parts are plated to resist rust. Most passenger car wheels can be balanced directly on the balancer. Bubble will not freeze. Restriction: Minimum 1-1/2" diameter hub holes to maximum 4-1/2" hub holes.

Model	EDP No.	Description	Size	Weight
B260	31360	Wheel Balancer	22"H x 12"W x 12"L	14 lbs (6.4 kg)
B261	31360-01	Balance Head		5.3 lbs (2.4 kg)
B262	31360-99	Bubble Device		.75 lbs (.3 kg)

BeadEze® Tire Lubricant

Lubricates tire and rim for ease in mounting. Dries quickly. Makes excellent leak detector when diluted. Available in convenient, squeezable bottles and one gallon refills.

Model	EDP No.	Description	Weight
T147A	35847	One Gallon	9 lbs (4.1 kg)
35848	35848	Six 16 oz. bottles	7.5 lbs (3.4 kg)

Detecto Mist® Air Leak Locator

Concentrated formula dilutes with water. Spray on tire or casing to instantly detect leaks. Ends messy dunking.

Model	EDP No.	Description	Weight
D105A	35805	One Quart	2.3 lbs (1 kg)

Bead Lubricant Swab

Use with T147A tire lubricant.

Model	EDP No.	Length	Weight
B111	30511	10" (25.4 cm)	3 oz (.1 kg)

Professional 4-Way Valve Core Tool



Handy 4-in-1 standard valve tool repairs cap threads, repairs core threads, has special easy-out feature for removing damaged cores, and screwdriver for removing standard cores. Black, heavy-duty hardened steel.

Model	EDP No.	Weight
T16P	30215	1 oz (.04 kg)

Professional Wheel Weight Tool

Clip-claw crowbar, punch designed handles, and heavy hammerhead provide years of use.

Model	EDP No.	Weight
B230	35354	1 lb (.5 kg)

Standard Wheel Weight Tool

This passenger car wheel weight tool is the industry standard.

Model	EDP No.	Weight
B232	35355	1 lb (.5 kg)

MADE IN U.S.A.

WARNING: Always wear safety goggles when using hand tools

Tire Inflation Cages

Mandatory for any shop working with tubeless and multi-piece rims. Made from heavy-gauge steel tubing welded to a steel base. Guards against blown lock rings and rims. Follow OSHA regulation 29-CFR Part 1910.177. Read safety label on cage. Designed to meet OSHA regulation requirements for Medium, Heavy-Duty Truck, OTR, Tractor, and Super Singles. Ken-Tool offers a size and design for all your needs. For additional safety labels and instructions, call Ken-Tool customer service.



Work safely.

Always use an inflation cage when inflating tires.

Follow OSHA regulation 29-CFR Part 1910.177 whenever changing tires.

Portable 2-Bar Cage

Patented

Model	EDP No.	Height A**	Width B	Base	Weight
T101	36001	41"	16"	7" closed x 21-1/2"	60 lbs
		104 cm	41 cm	18 cm closed x 55 cm	27.2 kg

Portable Wide Base Cage

Especially designed for wide base tires, this portable inflation cage will hold super singles, and super wide radial tires. Fits comparable tires up to: 445/50R 22.5.

Model	EDP No.	Height A**	Width B	Base	Weight
NEW T101A	36007	43-1/2"	20-1/2"	7" closed x 27"	72 lbs
		111 cm	52 cm	18 cm closed x 69 cm	32.6 kg

3-Bar Cage

Model	EDP No.	Height A**	Width B	Base	Weight
T106	36006	43-1/2"	20-1/2"	26" x 22"	134 lbs
		111 cm	52 cm	66 cm x 56 cm	60.7 kg

4-Bar Cage

Model	EDP No.	Height A**	Width B	Base	Weight
T102	36002	43-1/2"	20-1/2"	31-1/2" x 26"	146 lbs
		111 cm	52 cm	80 cm x 66 cm	66.2 kg

5-Bar Cage

Model	EDP No.	Height A**	Width B	Base	Weight
T105	36005	43-1/2"	20-1/2"	41" x 26"	182 lbs
		111 cm	52 cm	104 cm x 66 cm	82.5 kg

3-Bar Cage (OTR)

Model	EDP No.	Height A**	Width B	Base	Weight
T104	36004	65"	24"	30" x 27"	158 lbs
		165 cm	61 cm	76 cm x 69 cm	72.6 kg

** Height A refers to the approximate height to the inside bend of the cage.

WARNING: Tire changing can be dangerous, and should be done only by trained personnel using proper tools and equipment as directed by Federal OSHA Standard No. 29 CFR Part 1910.177. Tires may explode during inflation causing injury to operator or bystander. Wear safety goggles. Keep all parts of body outside cage. Use extension hose, clip-on chuck, and remote valve. See supervisor for safety procedures.

WARNING: Do not alter cage in any way. Cage must be freestanding and at least three feet from other objects. Discard cage if bent, cracked, or otherwise damaged. Always wear safety goggles.

Truck Tire Changing Stand

Stand handles wheels or open rims 16.5" to 24". Double-slide adjustment with locking device prevents twisting so it stays aligned with the wheel or rim. Stand is the ideal height for driving off beads or demounting tires. It must be used to be appreciated.

Model	EDP No.	Weight
T115	36015	21 lbs (9.5 kg)

MADE IN U.S.A.

Tire Snake®

Tire Snake mounting and demounting tools for use with center post tire changers. Patent nos. 5,971,052 and D412,271.

Small Tire Snake

Included with T600 Tire Changer, designed for wheels from 4" to 12".

Model	EDP No.	Length	Stock	Weight
34672	34672	22" (56 cm)	5/8" (2 cm)	2 lbs (.9 kg)

Medium Tire Snake

Included with T601 Tire Changer, designed for wheels from 4" to 13". Longer length provides greater leverage.

Model	EDP No.	Length	Stock	Weight
34674	34674	28" (71 cm)	5/8" (2 cm)	2.5 lbs (1.1 kg)

Air Blast Bead Seater for Small Tires



For your small tire changing needs, Ken-Tool introduces a fast, easy and economical way to seat beads in one simple operation with the new Air Blast Bead Seater. This patent-pending air-blaster bead seater, seats the bead on most small tubeless tires with rims ranging from 4 to 12 inches. This is a one-man operation; just point, release, and watch this fast-acting bead seater do all the work.

Model	EDP No.	Weight
31440	31440	5.6 lbs (2.5 kg)

ATV Bead Breaker

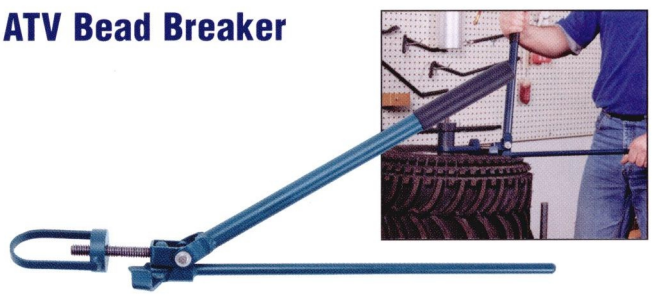

The ATV Bead Breaker is a manual solution that satisfies both manufacturers and tire changing technicians searching for a quick, safe, and affordable ATV bead breaker that really works. A rugged, yet lightweight tool that delivers the tremendous force necessary to overcome the resistance of a bead keeper. Constructed of heavy-duty steel, the ATV Bead Breaker works with any center post tire changing machine and adjusts to sizes of 6 to 12 inch ATV rims without the hassle of clevis pins. No hammers, wrenches, or additional tools are required. Very affordable! Patent no. 6,273,171,B1.

Model	EDP No.	Weight
38620	38620	7 lbs (3.2 kg)

Manual Tire Changers

Floor Mount

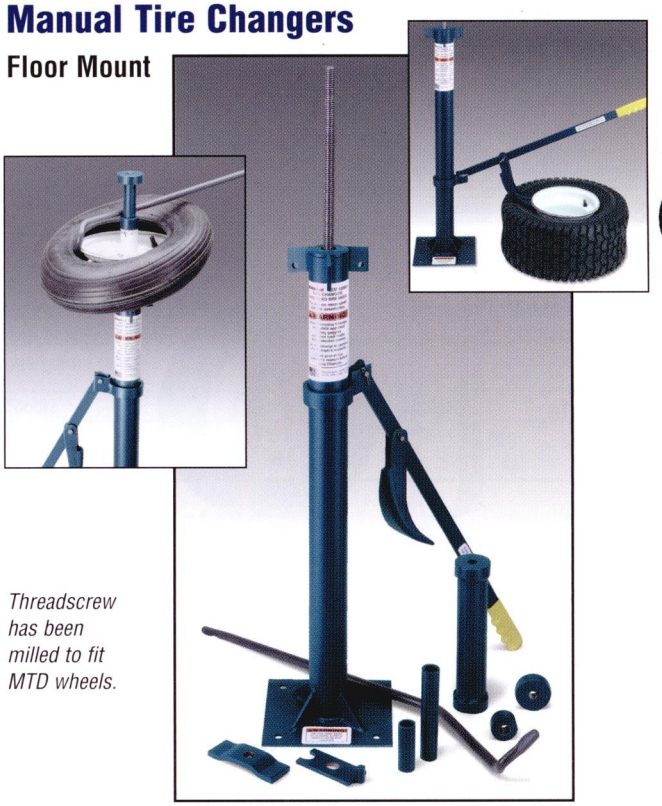

Threadscrew has been milled to fit MTD wheels.

Mounts and demounts a full range of tires on rim diameters from 4 to 15 inches. Tapered bearing guide positively centers straight shaft hubs of all diameters. A built-in, infinitely adjustable bead breaker works on rims up to 15" in diameter and 24" in width without disassembly. Includes a Ken-Tool exclusive, 28" Tire Snake™ mount/demount tire tool. Patent no. 6,145,566.

Model	EDP No.	Height	Weight
T601	38601	32" (81 cm)	31 lbs (14 kg)

Bench / Rim Clamp Mount

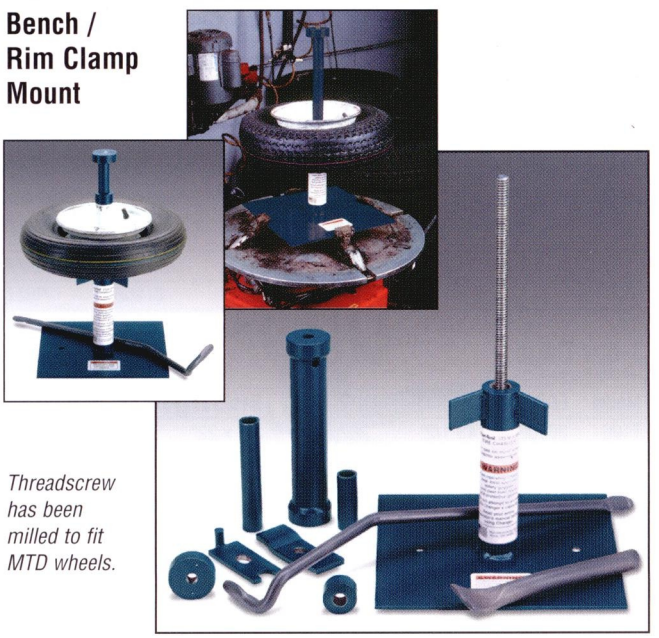

Threadscrew has been milled to fit MTD wheels.

Mounts and demounts a full range of tires on rim diameters from 4 to 12 inches. Mounts easily to a bench or in any standard, four-position rim-clamp tire changer. A built-in, three fin centering device mounts standard lug-type rims with 2" and larger center hole. Square base prevents turning in the changer during use. Includes a Ken-Tool exclusive, 22" Tire Snake™ mount/demount tire tool. Patent no. 6,145,566.

Model	EDP No.	Height	Weight
T600	38600	16-1/2" (42 cm)	21.7 lbs (10 kg)

See page 7 for additional small tire tools.

Front End Service Tools

These tools are manufactured from a single piece of alloy steel, forged, and heat-treated for long life. Essential when replacing suspension parts. Striking ends have been enlarged to provide a bigger and safer striking surface. Painted finish for rust resistance. Ken-Tool offers a size and design for all your needs.

Separator Tool

Use to remove camber adjustment sleeves on Ford 4 x 2 and 4 x 4 pickups. Use as Pitman arm wedge on medium and heavy-duty trucks.

Model	EDP No.	Length	Stock	Fork Opening	Weight
B36	32036	11" (28 cm)	7/8" (2 cm)	1-7/16" (4 cm)	1.9 lbs (.8 kg)

Pitman Arm Wedge

Removes Pitman arms on cars and light trucks.

Model	EDP No.	Length	Stock	Fork Opening	Weight
B37	32037	11" (28 cm)	7/8" (2 cm)	1- 1/8" (3 cm)	1.8 lbs (.8 kg)

Shock Link and Tie Rod Separator

Use to separate shock absorber links and tie rods.

Model	EDP No.	Length	Stock	Fork Opening	Weight
B39	32039	16" (41 cm)	7/8" (2 cm)	5/8" (2 cm)	2.1 lbs (.9 kg)

Ball Joint Separator

Use on spindle support arms to remove ball joints without damaging other suspension parts. Services compact cars and light duty trucks.

Model	EDP No.	Length	Stock	Fork Opening	Weight
B40	32040	16" (41 cm)	7/8" (2 cm)	15/16" (2 cm)	2.8 lbs (1.2 kg)

Pry Bars

Roll Head Pry Bars

P218

Use for many prying, positioning, and aligning jobs. Small sizes can be used for many jobs in the shop. Forged from top-quality steel. Heat-treated to resist bending and breaking. Roll head increases leverage.

Model	EDP No.	Length	Stock	Weight
P212	34212	12" (31 cm)	9/16" (14 mm)	.8 lbs (.3 kg)
P216	34216	16" (41 cm)	5/8" (16 mm)	1.3 lbs (.6 kg)
P218	34218	18" (46 cm)	3/4" (19 mm)	2.0 lbs (.9 kg)

Jimmy Pry Bars

P118

Long pointed taper can be used as a lining-up bar.
Used for prying, positioning, and aligning.

Model	EDP No.	Length	Stock	Weight
P118	34118	18" (46 cm)	11/16" (17 mm)	2.5 lbs (1.1 kg)
P124	34124	24" (61 cm)	3/4" (19 mm)	2.5 lbs (1.1 kg)
P130	34130	30" (76 cm)	7/8" (22 mm)	4.5 lbs (2.0 kg)

Wheel Cover Puller / Replacers

Removes wheel covers quickly and easily without gouging or scratching them. Rubber head **T11RH** prevents damage to hub cap and is replaceable.



Pro

Model	EDP No.	Length	Stock	Weight
T67	31567	17-1/2" (45 cm)	9/16" (14.3 mm)	1.8 lbs (.8 kg)

Standard

Model	EDP No.	Length	Stock	Weight
T68®	31568	14" (36 cm)	7/16" (11.1 mm)	1.3 lbs (.6 kg)

MacPherson Strut Coil Spring Compressor Set

Compressor works on most MacPherson Strut assemblies and is for use with replacements. Use the compressor when replacing bent strut or strut tube and damaged spindles. Use it on or off the car. Acme threaded screw for durability. Do not use on General Motors "A", "C", "J", or "X" body cars.

Model	EDP No.	Weight
39730	39730	7 lbs (3.1 kg)

Ductile Iron C-Clamps

This c-clamp is for the professional. Made from ductile iron for strength and toughness, with sliding pin handle and acme-thread screw. Imported.

Model	EDP No.	Jaw Opening	Depth	Screw Diameter	Std. Pack	Weight
KT-4	39604	4" 10 cm	2-1/16" 5 cm	5/8" 1.5 cm	6	1.8 lbs .8 kg
KT-6	39606	6" 15 cm	2-3/4" 7 cm	5/8" 1.5 cm	6	2.5 lbs 1.1 kg
KT-8	39608	8" 20 cm	3-1/4" 8 cm	3/4" 2 cm	1	3.5 lbs 1.6 kg

Ken-Tool® Professional Vises

All of Ken-Tool's Professional Vises feature:

- 360° swivel base
- Machined base plate for smooth swivel
- Gear-type locking system with double lock-down bolts
- Heavy-duty jaw beam covers screw
- Built-in anvils



- "V" notched, replaceable/reversible jaws made of carbon steel and heat-treated for extra strength, diamond cut on one side - smooth on the other



- Jaw faces have "V" notches for vertical gripping



- Built-in pipe jaws

Professional Workshop Vises

With high quality construction for extra durability and full-strength performance at any jaw opening, these vises are made for the professional - strong, durable, and built to last.
Made in China to Ken-Tool's designs and specifications.

K55 5-1/2"

Model	EDP No.	Jaw Width	Jaw Opening	Throat Depth	Pipe Jaw Capacity	Weight
K55	64055	5-1/2" 14 cm	6-1/2" 17 cm	3-3/16" 8 cm	1/8" - 2-1/2" .3 - 6 cm	30 lbs 14 kg

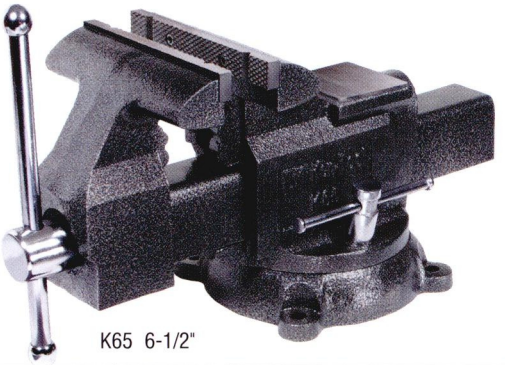

K65 6-1/2"

Model	EDP No.	Jaw Width	Jaw Opening	Throat Depth	Pipe Jaw Capacity	Weight
K65	64065	6-1/2" 17 cm	7-1/2" 19 cm	3-3/4" 10 cm	1/8" - 2-1/2" .3 - 6 cm	41 lbs 19 kg

Professional Reversible Mechanic's Vises

With our Reversible Vises you get all of the high quality features and rugged durability of the Pro Workshop Vises, and more! Significantly increase your gripping capacity when you reverse the position of the front jaw.
Made in China to Ken-Tool's designs and specifications.

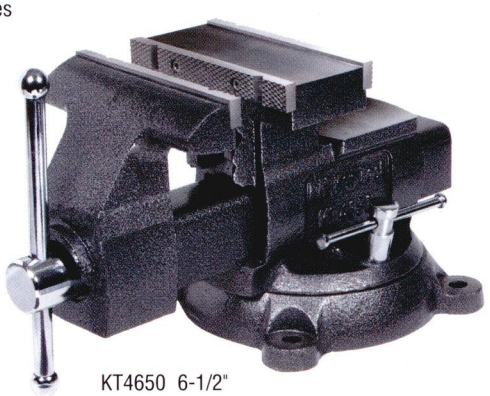

KT4650 6-1/2"

Model	EDP No.	Jaw Width	Jaw Opening	Throat Depth	Pipe Jaw Capacity	Weight
KT4650	64650	6-1/2" 17 cm	7" - 10" 18 - 25 cm	3-3/4" 9.5 cm	1/8" - 3" .3 - 8 cm	50 lbs 23 kg

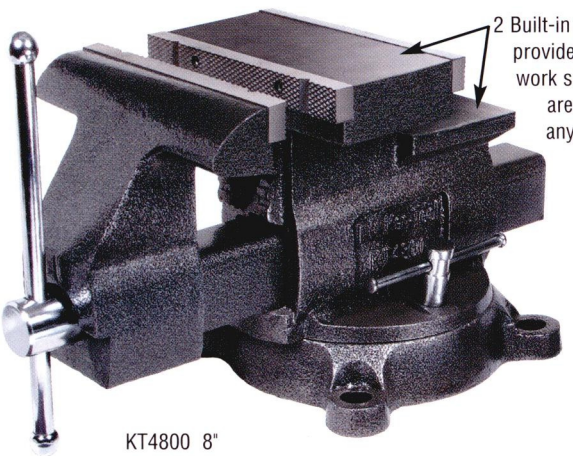

2 Built-in anvils provide more work surface area than any other vise

KT4800 8"

Model	EDP No.	Jaw Width	Jaw Opening	Throat Depth	Pipe Jaw Capacity	Weight
KT4800	64800	8" 20 cm	8 - 11" 20 - 28 cm	4-3/4" 12 cm	1/8" - 3" .3 - 8 cm	74 lbs 34 kg

Standard Position

Reverse Position



It's simple...Remove the jaw from the front of the base, swivel the base 180°, then re-insert the jaw.





WARNING: Always wear safety goggles when using hand tools

NUTBUSTERS BY Ken-Tool®

Economy Four-Way Lug Wrenches for the Do-It-Yourselfer

With NutBusters you have a complete line of lug wrenches value priced and merchandised to maximize your DIY business...And they're all tough and dependable - just what you'd expect from something called NutBuster!

Passenger Car

Chrome-plated finish, welded center. Imported

Model	EDP No.	Socket Sizes	Length	Stock	Weight
35630	35630	17 mm, 19 mm (3/4"),	20"	5/8"	3.7 lbs
		21 mm (13/16"), 23 mm (7/8")	51 cm	16 mm	1.7 kg
35635	35635	17 mm, 19 mm (3/4"),	14"	5/8"	2.6 lbs
		21 mm (13/16"), 23 mm (7/8")	36 cm	16 mm	1.2 kg

Folding Passenger Car

Chrome-plated finish. Imported

Model	EDP No.	Socket Sizes	Length	Stock	Weight
35633	35633	17 mm, 19 mm (3/4"),	14"	9/16"	2.7 lbs
		21 mm (13/16"), 23 mm (7/8")	36 cm	14 mm	1.2 kg

Telescoping Passenger Car

Chrome-plated finish. Imported

Model	EDP No.	Socket Sizes	Length	Stock	Weight
35634	35634	17 mm, 19 mm (3/4"),	21"(Extended)		3 lbs
		21 mm (13/16"), 23 mm (7/8")	53 cm		1.4 kg

Made in U.S.A.

Passenger Car

Painted finish, welded center.

Model	EDP No.	Socket Sizes	Length	Stock	Weight
35637	35637	17 mm, 19 mm (3/4"),	18"	9/16"	3.6 lbs
		21 mm (13/16"), 22 mm (7/8")	46 cm	14 mm	1.6 kg

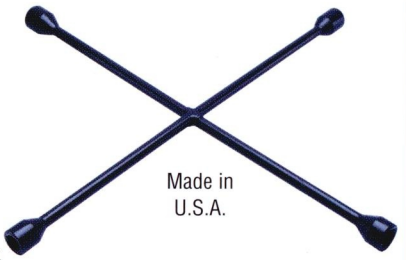

Made in U.S.A.

Light Truck/RV

Painted finish, welded center.

Model	EDP No.	Socket Sizes	Length	Stock	Weight
35638	35638	22 mm (7/8"), 24 mm (15/16"),	23"	11/16"	5.6 lbs
		25 mm (1"), 27 mm (1-1/16")	58 cm	17.5 mm	2.5 kg

NOTES

Ken-Tool®

768 E. North Street, P.O. Box 9320
Akron, Ohio 44305

Phone: 330-535-7177 • Fax: 330-535-1345

E-mail: sales@kentool.com

www.kentool.com

www.oldforge.com www.caricatools.com

CROSS REFERENCE CHARTS

EDP NO. - MODEL NO.

EDP NO.	MODEL NO.	PG. NO.	EDP NO.	MODEL NO.	PG. NO.	EDP NO.	MODEL NO.	PG. NO.	EDP NO.	MODEL NO.	PG. NO.	EDP NO.	MODEL NO.	PG. NO.	EDP NO.	MODEL NO.	PG. NO.
30110		13	30237		5	32116	T16A	7	34543	TR43	4	35329	T11E	11	35805	D105A	14
30111		13	30238		5	32117	T16C	7	34545	TR44X	4	35331	TG331	11	35847	T147A	14
30112		13	30239		5	32119	T19	9	34547	TR44SW	4	35332	TG332	11	35848		14
30113		13	30240		5	32120	T20	9	34644	T45A-2000K	9	35333	TG333	11	35924	T24B	6
30114		13	30352		12	32121	T21R	9	34645	T45A	9	35334	TG334	11	35926	T26B	6
30115		13	30356		12	32123	T23	7	34647	T45HD	9	35335	T335	11	35998	T98	6
30116		13	30362		12	32125	T25	7	34648	T48A	7	35336	T336	11	35999	T99B	6
30120		12	30366		12	32126	T26A	6	34652	T52	6	35337	TG337	11	36001	T101	15
30121		12	30511	B111	14	32127	T27	7	34660	T143A	7	35354	B230	14	36002	T102	15
30156		12	30515	T15	14	32128	T27A	7	34670	T100	6	35355	B232	14	36004	T104	15
30158		12	30605		5	32318	TR5	4	34672		16	35411	TG11B	10	36005	T105	15
30161		12	30606		12	32501	TR1	4	34674		16	35413	TG11R	10	36006	T106	15
30165		4	30609	TX9	6	32502	TR2	4	34746	T46	8	35417	TG33R	10	36007	T101A	15
30170		12	30610	TX10	6	32503	TR3	4	34747	T46A	8	35421	TG34	10	36015	T115	15
30174		5	30612	TX12	6	32505	TR3A	4	34748	T46B	8	35423	TG35	10	37003	80H-3	11
30175		5	30618	TX200	6	32506	TR3X	4	34749	T46C	8	35425	TG36	10	37004	80H-4	11
30176		5	30619	TX241	6	32508	TR98	4	34846	T47	8	35427	TG11D	11	37103	85H-3	11
30179		5	30620	TX50	6	32509	TR9	4	34847	T47A	8, 9	35429	TG11E	11	37113	85G-3	11
30181		5	31360	B260	14	32551	TRM1	4	34848	T47B	8	35431	TG37	10	37302	84H-2	11
30182		5	31360-01	B261	14	32552	TRM2	4	34849	T47C	8	35449	T2001	9	37304	84H-4	11
30183		5	31360-99	B262	14	32553	TRM3	4	34945	T45SX	8	35450	T2002	9	37308	84H-8	11
30184		5	31432	T132	12	32556	TRM6	4	34946	T45DX	8	35453		9	37310	84H-10	11
30185		5	31433	T133	12	32557	TRM7	4	35110		11	35460	T11K	11	37312	84H-12	11
30186		5	31437		12	32610		4	35111	T11BH	10	35529	T11AH	10	37316	84H-16	11
30187		5	31438		12	33219	T19A	9	35113	T11HN	10	35595	TC95	3	37320	84H-20	11
30188		5	31439		12	33220	T20A	9	35119	T11CH	10	35611		3	37404	84G-4	11
30189		5	31440		16	33223	T23A	7	35127	T11DH	10	35620	T9520	3	37408	84G-8	11
30195		5	31446		12	33224	T23B	7	35129	T11EH	10	35630		19	37410	84G-10	11
30196		5	31551	T51	14	33238	T38	9	35201	T12B	10	35633		19	37412	84G-12	11
30197		5	31553	T53	14	33239	T39	9	35202	T12D	10	35634		19	38600	T600	16
30198		5	31554	T54	14	33341	T41	6	35206	TG31H	10	35635		19	38601	T601	16
30199		5	31567	T67	17	33342	T42	6	35211	TG11BH	10	35637		19	38620		16
30200		5	31568	T68	17	34118	P118	17	35219	TG11CH	10	35638		19	39604	KT-4	17
30201		5	31710		8	34121	T21F	9	35227	TG11DH	10	35656	T56	3	39606	KT-6	17
30202		5	31810		8	34122	T21HD	9	35229	TG11EH	10	35657	T57	3	39608	KT-8	17
30203		5	32036	B36	17	34124	P124	17	35230	T11KH	10	35659	T59	3	39730		17
30204		5	32037	B37	17	34130	P130	17	35310	T32	11	35661	T61	3	39805	T43A	7
30215	T16P	14	32039	B39	17	34212	P212	17	35311	T11B	10	35662	T62	3	39806	T43C	8
30230		5	32040	B40	17	34216	P216	17	35313	T11R	10	35663	T63	3	39808	T44	8
30231		5	32101	T1X	9	34218	P218	17	35317	T33R	10	35690	T90	3	39810	T43D	8
30232		5	32102	T2X	9	34401	TR10	4	35321	T34	10	35695	T95	3	64055	K55	18
30233		5	32106	T6A	7	34402	TR11	4	35323	T35	10	35696	T96	3	64065	K65	18
30234		5	32109	T9A	7	34441	TR41	4	35325	T36	10	35697	T95A	3	64650	KT4650	18
30236		5	32110	T9C	7	34442	TR42	4	35327	T11D	11	35795	TM95	3	64800	KT4800	18

MODEL NO. - EDP NO.

MODEL NO.	EDP NO.	PG. NO.	MODEL NO.	EDP NO.	PG. NO.	MODEL NO.	EDP NO.	PG. NO.	MODEL NO.	EDP NO.	PG. NO.	MODEL NO.	EDP NO.	PG. NO.	MODEL NO.	EDP NO.	PG. NO.
80H-3	37003	11	KT-8	39608	17	T20	32120	9	T46	34746	8	T105	36005	15	TG333	35333	11
80H-4	37004	11	P118	34118	17	T20A	33220	9	T46A	34747	8	T105A	35805	14	TG334	35334	11
84G-4	37404	11	P124	34124	17	T21F	34121	9	T46B	34748	8	T106	36006	15	TG337	35337	11
84G-8	37408	11	P130	34130	17	T21HD	34122	9	T46C	34749	8	T115	36015	15	TM95	35795	3
84G-10	37410	11	P212	34212	17	T23A	33223	7	T47	34846	8	T132	31432	12	TR1	32501	4
84G-12	37412	11	P216	34216	17	T23B	33224	7	T47A	34847	8, 9	T133	31433	12	TR2	32502	4
84H-2	37302	11	P218	34218	17	T21R	32121	9	T47B	34848	8	T143A	34660	7	TR3	32503	4
84H-4	37304	11	T1X	32101	9	T23	32123	7	T47C	34849	8	T147A	35847	14	TR3A	32505	4
84H-8	37308	11	T2X	32102	9	T24B	35924	6	T48A	34648	7	T335	35335	11	TR3X	32506	4
84H-10	37310	11	T6A	32106	7	T26B	35926	6	T51	31551	14	T336	35336	11	TR5	32318	4
84H-12	37312	11	T9A	32109	7	T25	32125	7	T52	34652	6	T600	38600	16	TR9	32509	4
84H-16	37316	11	T9C	32110	7	T26A	32126	6	T53	31553	14	T601	38601	16	TR10	34401	4
84H-20	37320	11	T11AH	35529	10	T27	32127	7	T54	31554	14	T2001	35449	9	TR11	34402	4
85G-3	37113	11	T11B	35311	10	T27A	32128	7	T56	35656	3	T2002	35450	9	TR41	34441	4
85H-3	37103	11	T11BH	35111	10	T32	35310	11	T57	35657	3	T9520	35620	3	TR42	34442	4
B36	32036	17	T11CH	35119	10	T33R	35317	10	T59	35659	3	TC95	35595	3	TR43	34543	4
B37	32037	17	T11D	35327	11	T34	35321	10	T61	35661	3	TG11B	35411	10	TR44SW	34547	4
B39	32039	17	T11DH	35127	10	T35	35323	10	T62	35662	3	TG11BH	35211	10	TR44X	34545	4
B40	32040	17	T11E	35329	11	T36	35325	10	T63	35663	3	TG11CH	35219	10	TR98	32508	4
B111	30511	14	T11EH	35129	10	T38	33238	9	T67	31567	17	TG11D	35427	11	TRM1	32551	4
B230	35354	14	T11HN	35113	10	T39	33239	9	T68	31568	17	TG11DH	35227	10	TRM2	32552	4
B232	35355	14	T11K	35460	11	T41	33341	6	T90	35690	3	TG11E	35429	11	TRM3	32553	4
B260	31360	14	T11KH	35230	10	T42	33342	6	T95	35695	3	TG11EH	35229	10	TRM6	32556	4
B261	31360-01	14	T11R	35313	10	T43A	39805	7	T95A	35697	3	TG11R	35413	10	TRM7	32557	4
B262	31360-99	14	T12B	35201	10	T43C	39806	8	T96	35696	3	TG31H	35206	10	TX9	30609	6
D105A	35805	14	T12D	35202	10	T43D	39810	8	T98	35998	6	TG33R	35417	10	TX10	30610	6
K55	64055	18	T15	30515	14	T44	39808	8	T99B	35999	6	TG34	35421	10	TX12	30612	6
K65	64065	18	T16A	32116	7	T45A	34645	9	T100	34670	6	TG35	35423	10	TX50	30620	6
KT4650	64650	18	T16C	32117	7	T45A-2000K	34644	9	T101	36001	15	TG36	35425	10	TX200	30618	6
KT4800	64800	18	T16P	30215	15	T45HD	34647	9	T101A	36007	15	TG37	35431	10	TX241	30619	6
KT-4	39604	17	T19	32119	9	T45DX	34946	8	T102	36002	15	TG331	35331	11			
KT-6	39606	17	T19A	33219	9	T45SX	34945	8	T104	36004	15	TG332	35332	11			

Ken-Tool®

768 E. North Street, P.O. Box 9320
Akron, Ohio 44305

Phone: 330-535-7177 • Fax: 330-535-1345

E-mail: sales@kentool.com

www.kentool.com

www.oldforge.com www.caricatools.com

Distributed By: